

# Environmental Policy

Version 01.00 | Effective Date: 2023-01-01

## 1. Purpose and Scope

The purpose of this Environmental Policy is to define the organization's commitment to environmental protection and to provide a framework for the implementation and maintenance of an Environmental Management System (EMS) in accordance with ISO 14001:2015. This policy applies to all employees, contractors, and suppliers of the organization.

The organization is committed to:

- Compliance with applicable environmental laws and regulations.
- Prevention of pollution and minimization of environmental impacts.
- Conservation of resources and promotion of sustainable development.
- Continuous improvement of the EMS.

## 2. Environmental Objectives

The organization has established the following environmental objectives:

- Reduce greenhouse gas emissions by 10% over the next three years.
- Minimize water consumption and wastewater discharge.
- Reduce solid waste generation and increase recycling rates.

## 3. Management Commitment

The top management is committed to providing the resources necessary for the implementation and maintenance of the EMS.

## 4. Roles and Responsibilities

Management is responsible for the overall direction and control of the EMS. Employees are responsible for complying with the environmental requirements of the EMS.

The organization is committed to the following principles:


- Prevention of pollution.
- Compliance with applicable laws and regulations.
- Continuous improvement.

This policy is approved by the Board of Directors and is subject to periodic review and update.

## 5. Environmental Aspects

The organization has identified the following environmental aspects:

- Greenhouse gas emissions.
- Water consumption and wastewater discharge.
- Solid waste generation.





# IECEX Certificate of Conformity

Certificate No: IECEx PTB 14.0036

Issue No: 0

Date of Issue: 2017-08-08

Page 2 of 3

Manufacturer: **ROSE Systemtechnik GmbH**  
Erbeweg 13 - 15  
32457 Porta Westfalica  
Germany

Additional Manufacturing location(s):

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system is in accordance with the IECEx Rules: IECEx-EN and IECEx-OC.

IEC Standard list below and that the manufacturer's quality system is in accordance with the IECEx Rules: IECEx-EN and IECEx-OC.

Additional information:

The manufacturer is responsible for the conformity of the products covered by this certificate with the IECEx Rules: IECEx-EN and IECEx-OC.

Additional information:

Additional information:

Additional information:

Additional information:

Additional information:

Additional information:

Additional information:



# IECEX Certificate of Conformity

Certificate No: IECEx PTB 14.0036

Issue No: 0

Date of Issue: 2017-08-08

Page 3 of 3

## Schedule

### EQUIPMENT:

*Equipment and systems covered by this certificate are as follows:*

### Description

The power distribution, switch and control gear assembly, type 92. XX XX XX, consists of a sheet steel or stainless steel enclosure designed to Increased Safety "e" or Protection by Enclosure "tb" type of protection, which can be provided with, if necessary, it is used to accommodate field bus distributors and terminals, and can be provided with actuator elements and pilot lamps, if necessary. 'Ex' cable glands are used for connection. All installed and attached components are tested and certified with a separate examination certificate.

Technical Specification: IECEx PTB 14.0036 Annex.

**SPECIFIC CONDITIONS OF USE: NO**


### Annex

CoCA 14.0036\_00.pdf



Attachment 1





Enclosure standard Enclosure standard

No.	Enclosure Type	Height [mm]	Width [mm]	Depth [mm]	No.	Enclosure Type	Height [mm]	Width [mm]	Depth [mm]
1.	92.10 10 06	100	100	61	21.	92.30 30 15	306	306	151
2.	92.15 10 06	100	150	61	22.	92.30 30 16	300	300	161
3.	92.20 10 06	100	200	61	23.	92.40 30 16	300	400	161
4.	92.15 15 08	150	150	81	24.	92.45 38 15	458	382	151
5.	92.16 50 15	500	162	151	25.	92.50 30 16	300	500	161
6.	92.30 15 08	150	300	78	26.	92.38 30 21	300	380	211
7.	92.30 15 13	150	230	131	27.	92.38 38 16	380	380	161
8.	92.40 15 08	150	400	81	28.	92.38 38 21	380	380	211
9.	92.20 20 08	200	200	81	29.	92.40 40 16	400	400	161
10.	92.20 20 12	200	200	121	30.	92.40 40 16	400	400	161



6.	92.00 34 21	300	380	215	14.	92.00 43 16	300	400	165
7.	92.00 43 16	300	400	165	15.	92.00 64 21	380	600	215
8.	92.00 22 09	250	200	90	16.	92.00 99 99	Max. 1200	Max. 2000	Max. 500

Enclosure Flange



No.	Enclosure Type	Height [mm]	Width [mm]	Depth [mm]	No.	Enclosure Type	Height [mm]	Width [mm]	Depth [mm]
1.	92.12 12 09	120	120	90	8.	92.76 50 21	760	500	210
2.	92.16 16 09	160	160	90	9.	92.76 50 25	760	500	250
3.	92.13 18 13	180	130	130	10.	92.92 61 25	920	610	250
4.	92.31 31 15	306	306	150	11.	92.92 61 30	920	610	300
5.	92.46 38 15	460	380	150	12.	92.92 61 35	920	610	350
6.	92.76 50 15	760	500	150	13.	XX.XX XX XX	Max. 1200	Max. 2000	Max. 500
7.	92.92 61 20	920	610	200					

Enclosure Flange 2. generation

No.	Enclosure Type	Height [mm]	Width [mm]	Depth [mm]	No.	Enclosure Type	Height [mm]	Width [mm]	Depth [mm]
1.	92.XX 33 01	306	306	217	4.	92.XX 86 04	640	860	217
2.	92.XX 43 01	382	458	217	5.	92.XX 97 04	740	980	217
3.	92.XX 75 04	508	762	217	6.	92.XX 99 99	Max. 1200	Max. 2000	Max. 500

Enclosure ProtEx flange

No.	Enclosure Type	Height [mm]	Width [mm]	Depth [mm]	No.	Enclosure Type	Height [mm]	Width [mm]	Depth [mm]
1.	92.XX 02 00	260	260	205	7.	92.XX 08 00	620	450	205
2.	92.XX 03 00	306	306	205	8.	92.XX 09 00	740	550	205
3.	92.XX 04 00	380	260	205	9.	92.XX 10 00	762	508	205
4.	92.XX 05 00	458	382	205	10.	92.XX 11 00	860	640	205
5.	92.XX 06 00	480	480	205	11.	92.XX 12 00	914	610	205
6.	92.XX 07 00	500	350	205	12.	92.XX 13 00	980	740	205

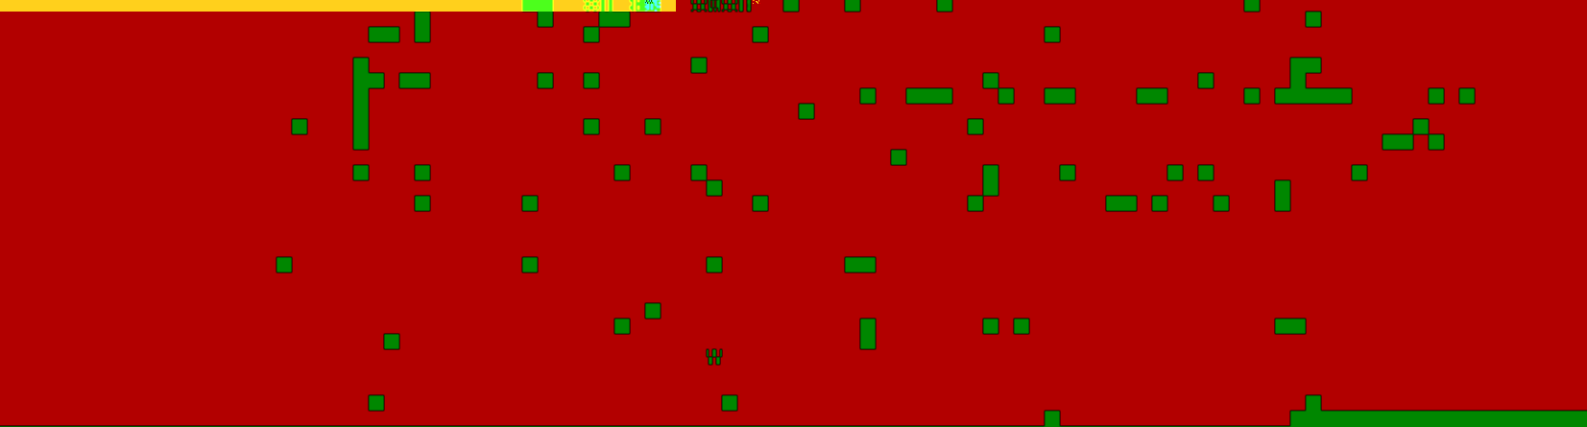





When more than one intrinsically safe circuit is used, the rules for interconnection are to be observed.

Degree of protection IP66 will be safeguarded only when sealing and cable entry fittings are properly fitted. The manufacturer's instructions must be followed.

Instructions

